


Technical Specification Dimensions

Working Dimensions

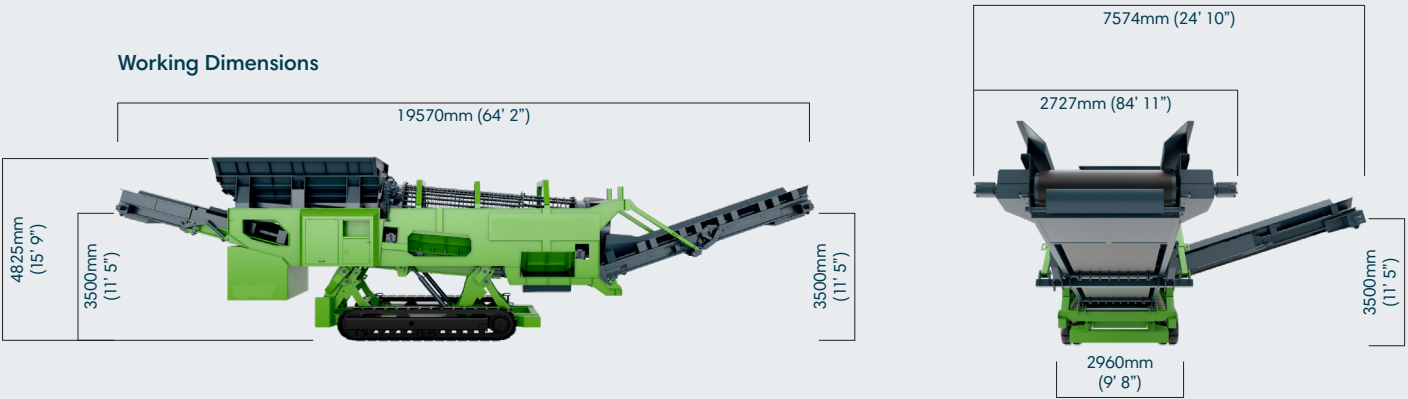


Transport Dimensions

Length:	15450mm (50' 8")
Width:	2960mm (9' 8")
Height:	3837mm (12' 7")

550T

Heavy Duty Rock Trommel

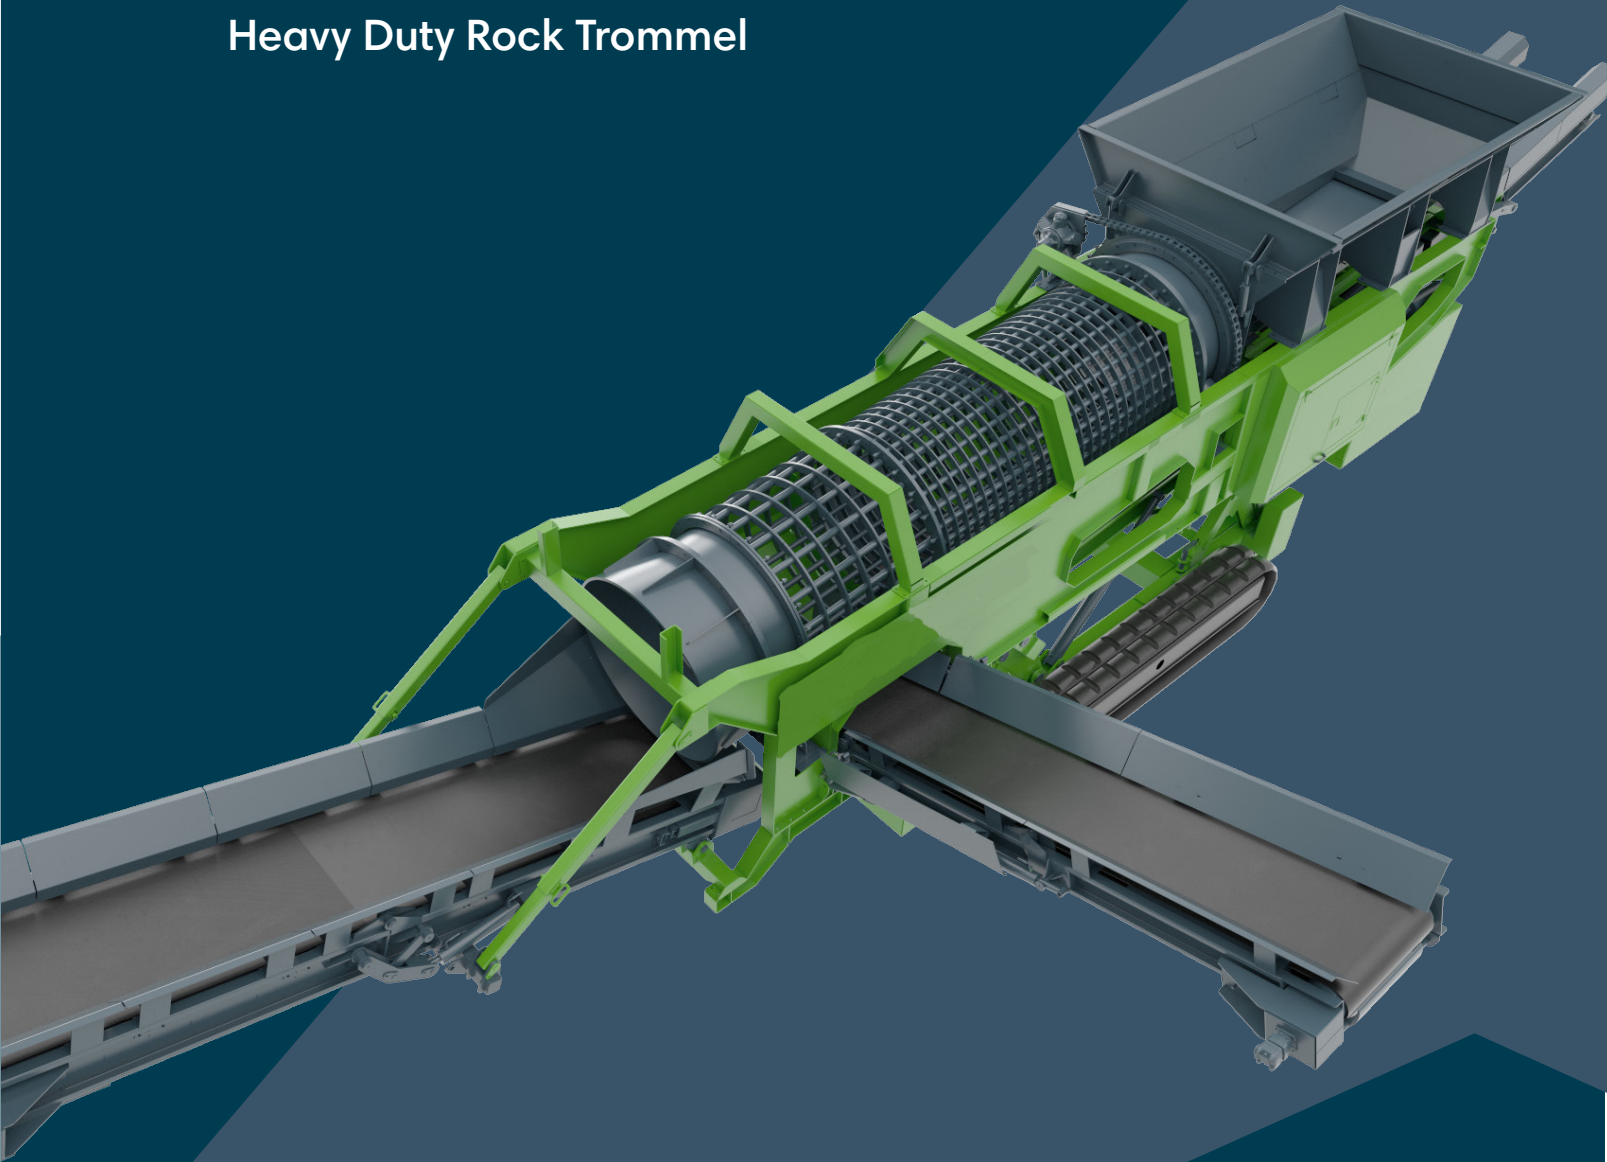


For further enquiries
please get in touch

W: <https://northrok.com>
E: info@northrok.com

MATERIAL HANDLING MIGHT.

The 550T is a high quality, powerful combination of efficiency and flexibility. We have designed the 550T to maximise your on site productivity and reduce your costs. With changeable screens, we can help you screen a wide range of materials from topsoil, sand and gravel to demolition waste, rocks and other aggregates.

The all-terrain track and adjustable height make this trommel ideal for moving around your site and between sites with minimum hassle, helping you to maximise your operational efficiency.

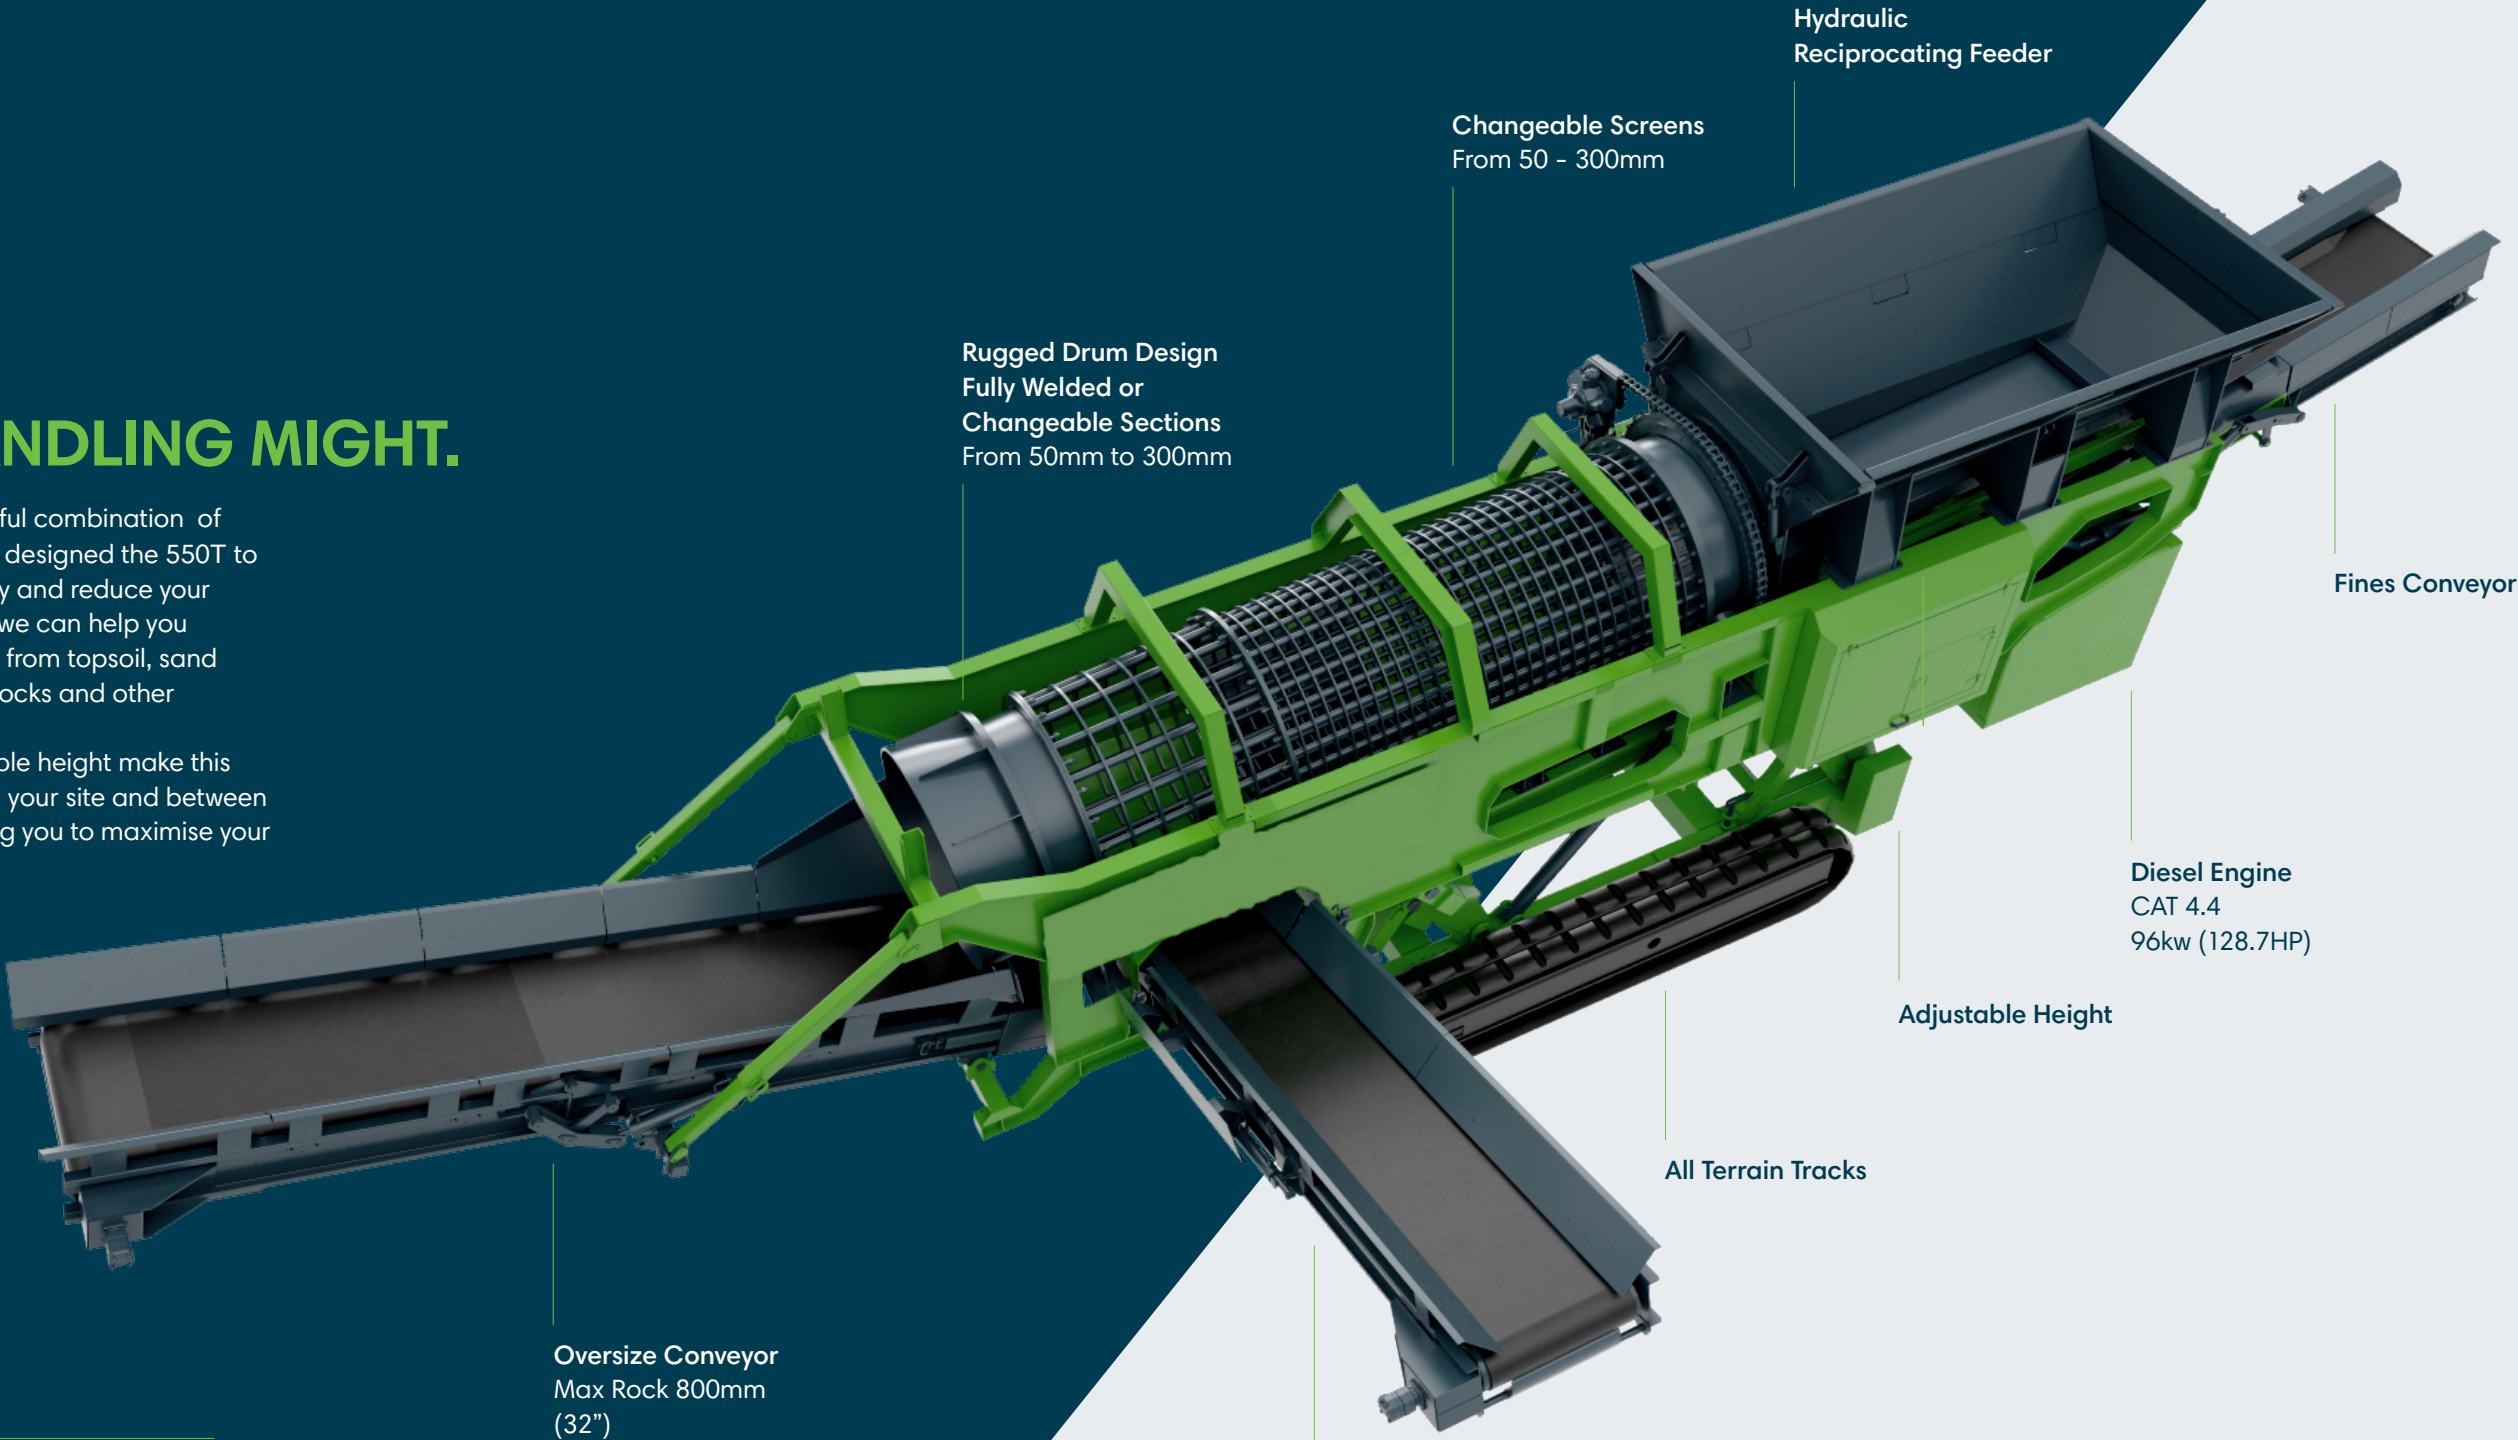

Suitable for

- Blasted Rock
- Demolition/Concrete
- Sticky/Dirty Clay
- Limestone
- Rip-Rap/Armour Rock
- Steel Slag

Features

- Dual Power available
- Rugged trommel drum
- Bolt-in screens available in various sizes
- Hopper Capacity 12.5m³
- Hydraulic Tipping Grid option

Hydraulic
Reciprocating Feeder

Changeable Screens
From 50 - 300mm

Rugged Drum Design
Fully Welded or
Changeable Sections
From 50mm to 300mm

Fines Conveyor

Diesel Engine
CAT 4.4
96kw (128.7HP)

Adjustable Height

All Terrain Tracks

Oversize Conveyor
Max Rock 800mm
(32")

Mid Size Conveyor
Max rock Size 450mm
(18")

Machine Specifications

Weight:	49 tons
Approx Tonnes per hour:	350-550
Drum Diameter:	1.5m (4ft 11")
Drum Length:	5.5m (18ft 1")
Number of Outputs:	3 off
Max Rock Size:	800mm (32")
Engine:	96kw (128.7hp) Cat 4.4
Transport Length:	15,450mm (50' 8")
Transport Width:	2960mm (9' 8")
Transport Height:	3500mm (11' 5")